



L-PRO

Designed in Germany

IP
65

Applications


Facade Lighting
Monument Lighting

Features

- Mounting : Surface / Pole
- High corrosion resistant pressure die cast aluminium housing Bracket
- Faceted Reflector, highly specular. Tempered safety Glass
- Beam angle available 18°, 30°, 55°, 73°
- Best in class power LEDs from reputed international companies
- Integral power LED driver
- Body Colour : White, Silver, Metallic, Anthracite

Mechanical Features

Product Code	Product Code	Packing Size D x B x H (mm)	Weight
XB 03 11	L- Pro Mini	136 x 142 x 153	1.65 Kg.
XB 03 16	L- Pro Midi	136 x 142 x 153	1.65 Kg.
XB 04 11	L- Pro Midi	200 x 215 x 246	4.90 Kg.
XB 04 16	L- Pro Maxi	200 x 215 x 246	4.90 Kg.

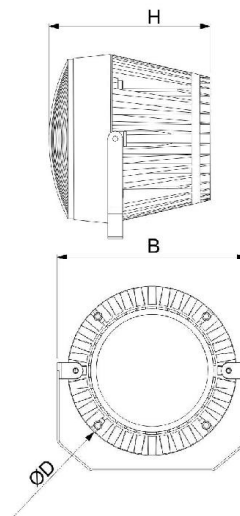

L-PRO

Designed in Germany

Urban Lighting

Specifications

Input Voltage	: 100 V - 265 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 5000 K
Colour Rendering Index	: > 75
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP65
Life Span	: 50,000 Hours
Safety Standard	: EN 60598
EMC/ EMI Standard	: EN61547 / EN55015
Harmonics	: EN61000-3-2 and 61000-3-3

Product Code	Product Code	Input Power	System Lumens for 5000 K
XB 03 11	L- Pro Mini	14 Watts	860
XB 03 16	L- Pro Midi	25 Watts	1875
XB 04 11	L- Pro Midi	38 Watts	2475
XB 04 16	L- Pro Maxi	58 Watts	3607

Specifications subject to change

Photometric Data

*Polar Candela Distribution

