



PATHFINDER

Designed in Germany

Applications


- Airports
- Stations
- Office Complex
- Shopping Malls
- Hotels
- Hospitals
- Cinema Halls
- Apartment Complex

Features

- Mounting : Universal mounting kit for ceiling and wall mounting
- 4 Legends and 1 white plug-in plastic sheet included
- Automatic self test in all standard versions
- Non-Maintained Power Mode / Maintained Power Mode
- Body Colour : Silver Grey

Mechanical Features

Product Code	Product Name	Size (mm) L x B x H	Weight
GS 01 24	Pathfinder S 24	240 x 45 x 175	1.2 Kg.
GS 01 32	Pathfinder S 32	320 x 45 x 205	1.36 Kg.
GD 01 24	Pathfinder D 24	240 x 45 x 200	0.75 Kg.
GR 01 24	Pathfinder RS	275 x 82.5 x 211	0.85 Kg.

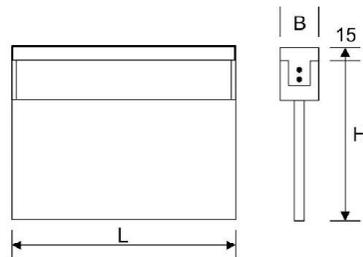

PATHFINDER

Designed in Germany

Specifications

Input Voltage	: 190 V - 265 V AC
Battery	: Self-contained Nicad Battery
Battery Back-up	: 3 Hours
Frequency	: 50/60 Hz
LED make	: Osram
Self Test	: 7 Days - Automatic
Average Luminance (White):	≥ 500 cd/m ²
Colour Temperatures	: 6000 K
Colour Rendering Index	: NA
Optics	: Acrylic Diffuser
Uniformity	: ≥ 0.2
Safety Standard	: EN 60598
EMC/ EMI Standard	: EN61547 / EN55015
Emergency Lighting	: EN1838 / CIE S 020 / E:2007

Product Code	Product Name	Input Power	Viewing Distance (m)
GS 01 24	Pathfinder S 24	6 Watts	24
GS 01 32	Pathfinder S 32	8 Watts	32
GD 01 24	Pathfinder D 24	6 Watts	24
GR 01 24	Pathfinder D RS	6 Watts	24

Specifications subject to change

Emergency Exit Lights

Options Available



4 Different Pictograms for Exit Lights

Pictograms also available for Signage Purposes

Toilets / OPD / Cash / Multiplex
without battery backup