



BATTEN


IP
20

Features

- Housing: Extruded Plastic
- Opal PMMA diffuser
- Best in class power LEDs
- Inbuilt electronic driver
- Standard Body Colour: White

Mechanical Features

Product Code	Size (mm) (L x B)	Weight (gm)
BTT8 - 010	600 X 30	250
BTT8 - 018	1200 X 30	480
BTT8 - 020	1200 X 30	480
BTT8 - 022	1200 X 30	480

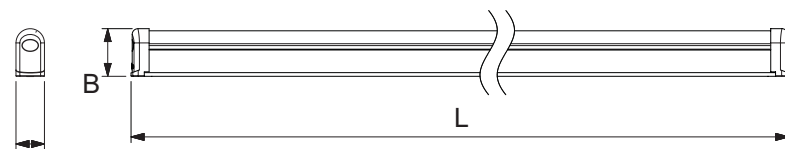

Applications

- Offices
- Classrooms
- Auditoriums
- Hospitals
- Sports Halls
- Industries

For Pricing Enquiry : sales@GoldwynLED.com

BATTEN

Specifications


Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 80
Lumen Efficacy	: 100 Lumen per Watt
Ingress Protection	: IP20
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598

Product Code	Input Power	System Lumens	Replacement of	Energy Savings
BTT8 - 010	10 Watts	1000	18 W FTL	50%
BTT8 - 018	18 Watts	1800	36 W FTL	50%
BTT8 - 020	20 Watts	2000	36 W FTL	50%
BTT8 - 022	22 Watts	2200	36 W FTL	50%

Specifications subject to change

Photometric Data

Polar Candela Distribution

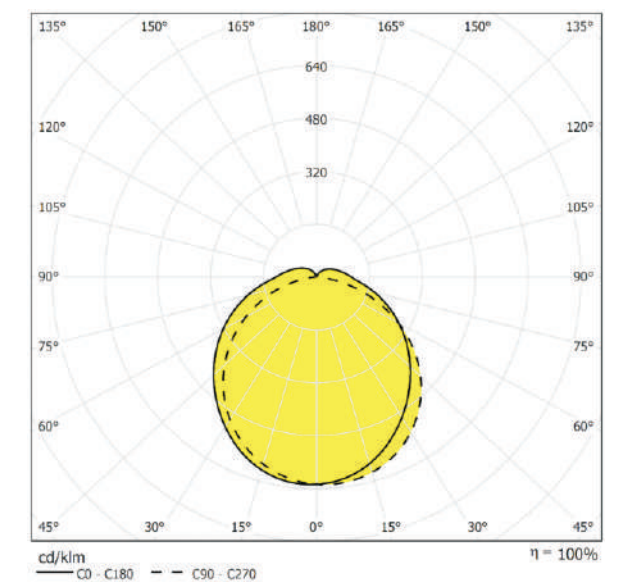

Cone Diagram for 20W T8-AH20

Distance (M)	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.00M	627 LUX	3.40 M 2.97 M
2.00M	157 LUX	6.80 M 5.94 M
3.00M	69.7 LUX	10.20 M 8.90 M
4.00M	39.2 LUX	13.60 M 11.87 M
5.00M	25.1 LUX	17.00 M 14.84 M
6.00M	17.4 LUX	20.41 M 17.82 M

■ Vert. Spread: 119.1°
■ Horiz. Spread: 112.1°