



Canopy

IP
65

Applications

- Canopies
- Entryways
- Exterior Ceiling
- Parking Garages


Features

- Mounting: Recessed, Canopy
- Housing: Pressure Die Cast Aluminium
- Multiple Designs to select from
- Matrix of high power high efficacy SMD LED's.
- Inbuilt electronic driver
- Standard Body Colour: Grey & White

Mechanical Features

Product Code	Size (mm) L x B x H	Weight (Kg)
CA - 070	450 x 450 x 80	7.5
CA - 080	450 x 450 x 80	7.5
CA - 100	450 x 450 x 80	7.5

Mechanical Diagram

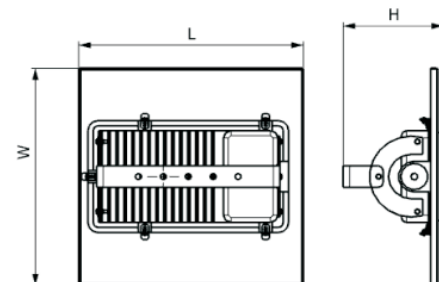


For Pricing Enquiry : sales@GoldwynLED.com

Canopy

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 70
Lumen Efficacy	: 100 Lumen per Watt
Ingress Protection	: IP65
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2

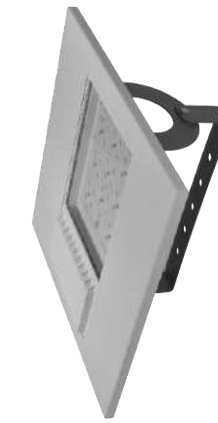

Product Code	Input Power	System Lumens	Replacement of	Energy Saving
CA - 070	70 Watts	7000	150W MH	65 %
CA - 080	80 Watts	8000	200W MH	70 %
CA - 100	100 Watts	10000	250W MH	70 %

Specifications subject to change

Cone Diagram 80 W CA - 080

	Illuminance at a Distance		Beam Width	
	Center Beam LUX			
1.67M	1,612 LUX	3.06 M	3.41 M	
3.33M	403 LUX	6.12 M	6.82 M	
5.00M	179 LUX	9.17 M	10.23 M	
6.67M	101 LUX	12.23 M	13.64 M	
8.33M	64.5 LUX	15.29 M	17.05 M	
10.00M	44.8 LUX	18.35 M	20.46 M	

■ Vert. Spread: 85.1°
■ Horiz. Spread: 91.3°

Photometric Data

*Polar Candela Distribution

