



## POLAR BOLLARD



### Applications


- Gardens
- Parks
- Roundabouts
- Pathways
- Pavements
- Public Outdoor Light

### Features

- Mounting: Ground
- Housing: Corrosion resistant aluminium
- Triple layered opal glass, Satin finish
- Diffuser Mounting - bayonet lock
- Best in class power LEDs
- Inbuilt electronic driver
- Standard Body Colour : Black. Other options available

### Mechanical Features

Product Code	Size (mm) Ø H	Weight (Kg)
LSP - 010	80 X 600, 800, 1000	3

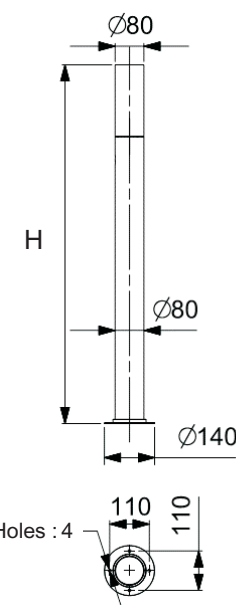

Ø8,5 Mounting Holes : 4

For Pricing Enquiry : [sales@GoldwynLED.com](mailto:sales@GoldwynLED.com)

## POLAR

### Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 75
Lumen Efficacy	: > 90 Lumens per Watt
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP65 / IP66
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2


Product Code	Input Power	System Lumens
LSP - 010	10 Watts	800

\*Height Available (600mm, 800mm & 1000mm)

Specifications subject to change

### Photometric Data

\*Polar Candela Distribution

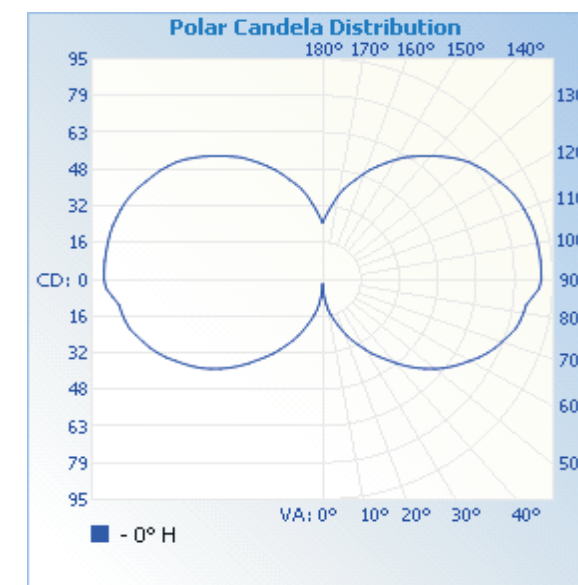

## Bollard

