



RIVIERA Mid Bay

Product Design Registered

IP
20

Applications


- Assembly Production
- Auditoriums
- Hospitals
- Corridors
- Entrance Halls

Features

- Mounting : Suspended/ Surface/ Recessed
- Extruded aluminium Housing
- Prismatic / Opal acrylic diffuser
- Best in class power LEDs
- Inbuilt electronic driver
- Standard Body Colour :Natural Anodised. Other options available.

Mechanical Features

Product Code	Size (mm) L x B x H	Weight (Kg)
LB - 016	575 x 90 x 94	1.6
LB - 032	1220 x 90 x 94	3.5
LB - 040	1220 x 90 x 94	3.5

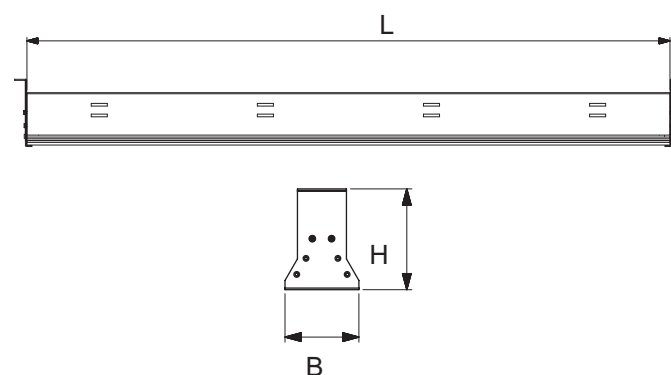

For Pricing Enquiry : sales@GoldwynLED.com

RIVIERA

Mid Bay

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 70
Lumen Efficacy	: > 85 Lumens per Watt
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP20
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2


Product Code	Input Power	System Lumens	Replacement of	Energy Saving
LB - 016	16 Watts	1375	2 x 18W CFL	62 %
LB - 032	32 Watts	2750	2 x 26W CFL	42 %
LB - 040	40 Watts	3400	2 x 36W CFL	46 %

Specifications subject to change



Photometric Data

*Polar Candela Distribution

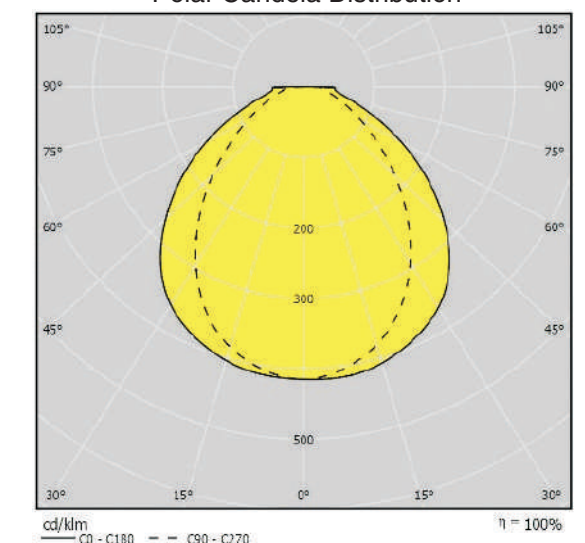

Cone Diagram for 40W LB - 040

Distance (M)	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.33M	874 LUX	2.62 M 2.63 M
2.67M	218 LUX	5.24 M 5.26 M
4.00M	97.0 LUX	7.86 M 7.89 M
5.33M	54.5 LUX	10.48 M 10.52 M
6.67M	34.9 LUX	13.09 M 13.15 M
8.00M	24.2 LUX	15.72 M 15.78 M

■ Vert. Spread: 89.0°
■ Horiz. Spread: 89.2°