

NEWSLETTER

GOLDWYN
LED


Smart Lighting



NEW

KAPSULE

FOR VIA DUCT & TUNNEL LIGHTING

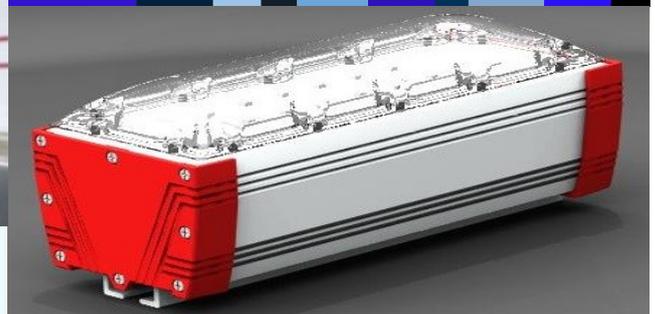

GOLDWYN is proud to offer the most efficient solution for Tunnel and Via Duct lighting : KAPSULE. It ensures long life characteristics with energy reduction due to zero maintenance required compared to conventional technologies. The system with a variety of high quality optical control delivers uniform and energy efficient illumination optimized to enhance all lighting requirement in such demanding environment.

- Application : VIA DUCT / TUNNELS / CONVEYORS & INDUSTRIES
- Mounting : Surface / Suspended
- Housing : Extruded Aluminium
- Ingress Protection : IP 67
- Impact Rating : IK10
- Maintenance Free
- Long Life Span : Typically 50,000 Hours
- Instantaneous Start : Important for Safety
- Efficient Electronic Driver with Power Factor : > 0.9
- Wattage : 25 W
- Safety Standard : EN60598
- EMI/ EMC : EN61547/EN55015
- Harmonics : EN61000-3-2, EN61000-3-3
- Colour Rendering Index : > 70
- Correlated Colour Temperatures : 3000 K / 4000 K/ 6000 K
- Lumen output : 1800 Lumen at 6000K
- Different Optical Beam Distributions

