



GLOBUS Post Top Light

IP
65


Features
• Mounting: Pole Top
• Housing: Powder Coated Die Cast Aluminium
• Multiple Designs to select from
• Matrix of high power high efficacy SMD LED's.
• Inbuilt electronic driver
• Standard Body Colour: Black

Mechanical Features

Product Code	Size (mm) (Ø x H)	Weight (Kg)	Pole Die Meter (mm)
LS - 030	(Ø426 x 470)	4.0	Ø 60
LS - 040	(Ø426 x 470)	4.0	Ø 60
LS - 050	(Ø426 x 470)	4.0	Ø 60

Applications
Parks
Urban Estates
Pathways
City Plaza

Mechanical Diagram

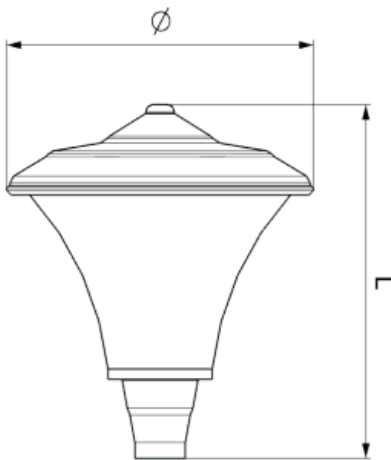

For Pricing Enquiry : sales@GoldwynLED.com

GLOBUS

Post Top Light

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 70
Lumen Efficiency	: > 90 Lumens per watt
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP65
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2

Product Code	Input Power	System Lumens
LS - 030	30 Watts	2700
LS - 040	40 Watts	3600
LS - 050	50 Watts	4500

Photometric Data

*Polar Candela Distribution

