



OLYMPIA Mid Bay

IP
65

Features


- Mounting : Suspended
- Pressure die cast aluminium heat sink
- Spun Aluminium dome
- Best in class COB LEDs
- Inbuilt electronic driver
- Standard Body Colour : Black / White

Mechanical Features

Product Code	Size (mm) L x B x H	Weight (Kg)
HB - 050	320 x 405	3
HB - 060	320 x 405	3

Applications

Industrial Units
Corridors
Shopping Malls
Showrooms
Hotels
Hospitals

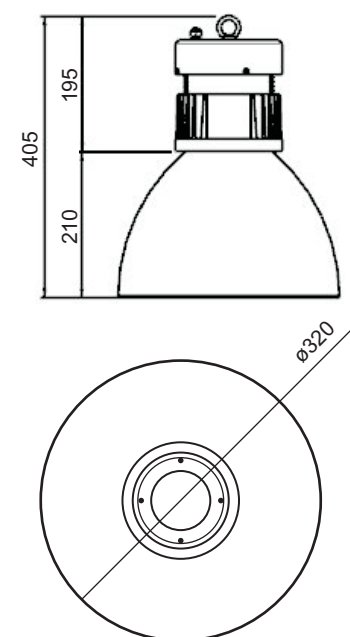

For Pricing Enquiry : sales@GoldwynLED.com

OLYMPIA

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K / 4000 K / 6000 K
Colour Rendering Index	: > 70
Lumens Efficacy	: > 100 Lumens per watt
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP65
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2

Product Code	Input Power (W)	System Lumens	Replacement of	Energy Saving
HB - 050	50	5000	150 SON-T	65 %
HB - 060	60	6000	150 MH	63 %


Specifications subject to change

Mid Bay



Photometric Data

*Polar Candela Distribution

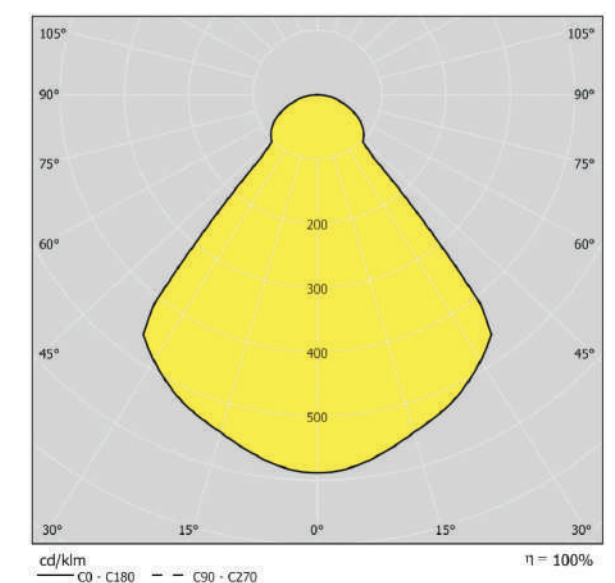

Cone Diagram for 60W - HB - 060

Illuminance at a Distance		
	Center Beam LUX	Beam Width
0.83M	3,956 LUX	1.37 M
1.67M	985 LUX	2.74 M
2.50M	438 LUX	4.11 M
3.33M	246 LUX	5.49 M
4.17M	158 LUX	6.86 M
5.00M	110 LUX	8.22 M
■ Beam Spread: 78.9°		