



SENTRY BOLLARD

Applications

- Parks
- Pathways
- Public Outdoor Light




Features

- Mounting: Ground
- Housing: Corrosion resistant aluminium
- Polyester painting with phosphochromating pre-finish.
- Best in class power LEDs
- Inbuilt electronic driver
- Standard Body Colour : Black

Mechanical Features

Product Code	Packaging Size (mm) Ø H	Weight
XW 06 13	Ø108 x H150	1.8 Kg.
XW 06 12	Ø108 x H550	2.0 Kg.
XW 06 11	Ø108 x H750	2.2 Kg.

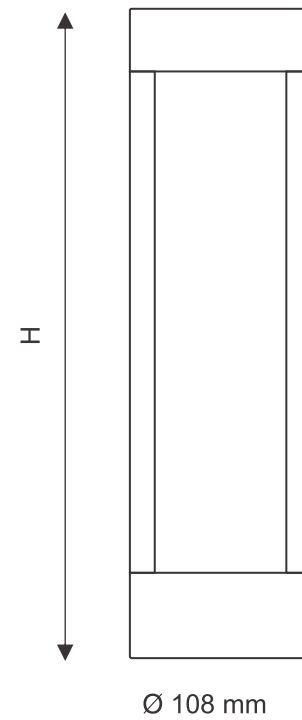

For Pricing Enquiry : sales@GoldwynLED.com

SENTRY

Bollard

Specifications

Input Voltage	: 220 V - 240 V AC
Frequency	: 50/60 Hz
Power Factor @230 VAC	: > 0.9
Colour Temperatures	: 3000 K
Colour Rendering Index	: > 70
Operating Temperature	: -20° C to 50° C
Ingress Protection	: IP55
Mounting	: Ground
Life Span	: 50,000 Hours
Safety Standard	: IEC 60598
EMC/ EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2

Product Code	Input Power	System Lumens
XW 06 13	5 Watts	240
XW 06 12	5 Watts	240
XW 06 11	5 Watts	240

Specifications subject to change



Photometric Data

*Polar Candela Distribution

