

DELTA



Goldwyn's new Delta industrial light made of extruded aluminium powder coated housing. High efficiency PMMA Lens for excellent light distribution offers life long characteristics with energy reduction due to zero maintenance compared to conventional technologies. Goldwyn is proud to offer the most efficient solution for Warehouses, Industrial Sheds, Cold Storages, Railway Stations, Shopping Malls : Delta. The system with a variety of high quality optical control delivers uniform wide distribution and energy efficient illumination optimized to enhance all lighting requirement in such demanding environment.


Features

- Mounting : Suspended
- Extruded aluminium powder coating housing
- High Efficiency PMMA lens for excellent light distribution
- Best in class power LED's from reputed international companies
- Inbuilt electronic driver
- Body Colour:- White / Black


Specifications

Wattages	100 W – 300 W
Input Voltage	100 V – 260 V AC
Frequency	50/60 HZ
Power Factor @ 230 VAC	>0.9
Colour Temperatures	3000 K / 4000 K / 6000 K
CRI	> 70
Lumen Efficacy	>105 Lumens per watt
Ingress Protection	IP 65
Life Span	50,000 Hours
Safety Standard	EN 60598
EMC / EMI Standard	EN61547 / EN55015

Photometric Data

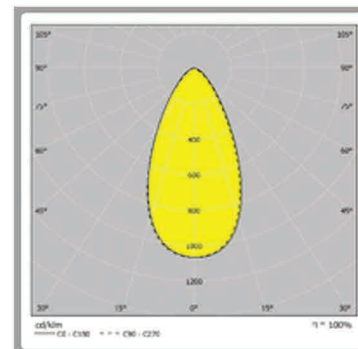

Cone Diagram

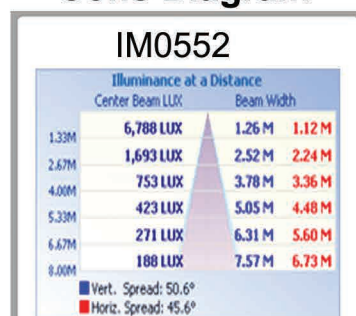

Applications

**Warehouses
Industrial Sheds
Cold Storages
Railway Stations
Airport Hangers
Shopping Malls**